

Advance Aquamatic Selectric™ Automatic Carpet Extractor



Standard Features Include:

- 75 foot (23 m) detachable power cord
- 25 gallon (94 l.) solution tank
- Four speeds forward and reverse

Some Ideal Applications Include:

- Hotels
- Restaurants
- Contract Cleaners
- Educational Institutions

The Aquamatic Selectric™ carpet extractor is fast and easy to use. It leaves carpet clean and ready for traffic in no time at all. Set your speed, squeeze the hand grips and the Selectric power scrubs and vacuums an 18 inch (46 cm) path, extracting at a rate of 3,800 square feet (260 m²) an hour.

Compact size and self-propelling drive makes the Aquamatic Selectric™ easy to maneuver. Turns away from the wall without backing up because steering caster is up front. The low profile makes it easy for operators to see what they're maneuvering around.

Touch & Go™ electronic controls govern the working speed. Just choose from four forward speeds or four reverse. Set your speed, squeeze the grips and go. Operation is that easy.

The "tank in tank" design makes for maximum productivity. Recovery automatically stops when tank is full.

The Aquamatic Selectric™ with the floating action of its cylindrical brush and vacuum pick-up shoe cleans uneven floor surfaces too. Single wide-angle spray nozzle has large orifice, less down time.


Cord electric power means the Aquamatic Selectric™ will keep working as long as you want to. It also means the Selectric is light enough to be lifted by two people into a truck or van, so it's portable. Check out the many other features of this labor saving money maker.

The Aquamatic Selectric™ can also be used with a variety of optional hand tools for cleaning stairs or other hard to reach places.



Advance
by Nilfisk-Advance


Advance Aquamatic Selectric™ Automatic Carpet Extractor

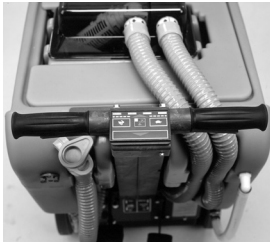

Touch & Go™ controls are easy to use. Choose from four forward speeds and four reverse, squeeze the hand grips and go.




Tight turns are no problem. A front steering caster and self-propelling drive make it easy to extract even in congested areas.



Designed for easy access to service areas, the Selectric stands on end for fast access to components.



Both solution and recovery tanks drain completely. Dump and refill times are kept to a minimum.

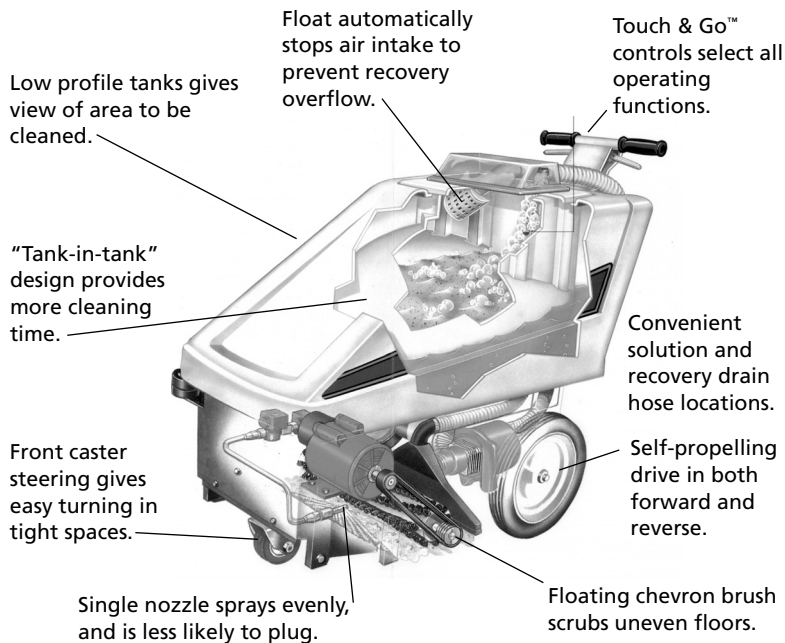

Only 72 dB(A)

Setting Standards...

- Our products are value-priced to give you the best combination of price and performance for your investment.
- You can get expert service and maintenance for your products by factory-trained personnel around the world, as well as fast parts delivery.
- Maintain peak performance with genuine **apa** parts.



Technical Specifications

Drive Motor: 120v/60 Hz, .1 hp, .6 amp motor with belt drive to differential.

Speed Control: Touch & Go™ electronic control panel with LED lights located on the top of the handle assembly gives speed selection as well as travel direction.

Travel Speeds: Four speeds forward and reverse.

Power Cable: Detachable 75 ft (22.5 m) 14/3 wire

Power Draw: Max amp draw – 14.5 amps.

Brush Motor: ½ hp, 120v/60 Hz, 3.5 amp, reversing motor, totally enclosed.

Brush Drive: Poly-V belt

Brush: 18 inches (46 cm) long, 3 inch (8 cm) diameter, nylon bristle with chevron pattern. Turns 1200 r.p.m. Floatation mounted, with foot-operated brush-lift lever.

Solution Tank: 25 gallon (95 l.), polyethylene.

Solution Pump: diaphragm pump, rated .78 g.p.m. (3 l./min.) at 60 p.s.i. (4 bar) max, operating rate is 30 p.s.i. (2 bar).

Solution Control: Automatic control in forward with an electric solenoid activated by squeezing the hand levers. Automatic shut-off in reverse. Single nozzle spray.

Vacuum Motor: 120v/60 Hz, 1.5 hp, 10 amp, three-stage by-pass design. 99 c.f.m. (2800 l./min.) with 2 inch (5 cm) orifice. 117 inch (297 cm) sealed waterlift.

Vacuum Shoe: 20 inch (51 cm) wide, stainless steel on floating mount.

Cleaning Path: 18 inches (46 cm)

Recovery Tank: 15 gallon (56 l.) polyethylene, with float system to prevent overflow when tank is full. Drain hose is located at the rear of machine.

Dimensions: Length – 46 inches (117 cm)
Width – 21 inches (53 cm)
Height – 39 inches (100 cm)

Weight: Net – 199 lbs. (90 kg)
Shipping – 229 lbs. (104 kg)

Part Number: 56 263 501

Specifications are subject to change without notice.



Advance
by Nilfisk-Advance

14600 21st Avenue North
Plymouth, MN, 55447-3408
www.nilfisk-advance.com
Phone: 800-989-2235
Fax: 800-989-6566

396 Wattline Avenue
Mississauga, Ontario, Canada, L4Z 1X2
www.nilfisk-advance.com
Phone: 800-668-8400 or 905-712-3260
Fax: 800-263-5111 or 905-712-3255

©2004, Nilfisk-Advance, Inc.,
Printed in U.S.A., Form L0980A, 3/04