



Charger 2716 DB Plus

27-Inch Battery Burnisher



Beyond tremendous productivity gains, the Charger 2716 DB Plus battery burnisher produces a wet-look shine without the high maintenance costs and hassles of a propane burnisher.

- Up to 70 pounds of pad pressure ensures a brilliant, high gloss shine.
- Quiet operation (only 68 dBA) provides scheduling flexibility to burnish floors in occupied facilities at any time, with minimal disruption to customers and coworkers.
- Six-325 AH PROeye batteries result in over 3-1/2 hours of run time for increased productivity.
- Variable-speed wheel drive, forward and reverse, allows the operator to match the machine's drive speed to a comfortable working pace hour after hour.
- Two-wheel drive with differential results in tremendous productivity and maneuverability.
- 7-gauge steel frame provides a strong, rugged structure.
- Low profile offset pad driver makes burnishing under shelves easy.



NSS® Enterprises, Inc.
3115 Frenchmens Road
Toledo, Ohio 43607-2958
USA
www.nss.com



Printed on Green Seal® certified
paper that contains 30% recycled
post-consumer fiber.

Charger 2716 DB Plus Specifications

Pad Speed	1600 RPM	Drive Speed	Variable, up to 246 ft./min. (75 m) forward, up to 148 ft./min. (45 m) reverse	Construction	
Pad Size	27-in. (68.5 cm)			-Wheels	
Pad Driver	27-in. (68.5 cm)	Switches & Controls	Master on/off switch. Safety switch prevents accidental pad rotation in raised position. Twist grip propulsion control. Lever on rear panel lowers machine from operator to transport to pad-change position.	• Front	Two 9 in. (23 cm) ball-bearing type
Motor				• Rear	One 4 in. (10 cm) ball-bearing swivel-type
-Type	DC permanent magnet			Sound Level	68 dBA
-Voltage	36V			Dimensions	
-HP	3 HP			-Length	59-in. (150 cm)
-RPM	1500 (Full load)			-Width	30-in. (76 cm)
Batteries	Six 6V., 325 AH	Overload Protection	90 amp reset circuit breaker	-Height	39-in. (99 cm)
Drive	Chain drive differential	Construction		-Weight	
Drive Motor		-Frame	7-gauge steel	• Machine	918 lbs. (417 kg)
-Type	DC permanent magnet	-Housing	Rotocast polyethylene	• Shipping	988 lbs. (449 kg)
-Voltage	36V	-Flexiwall Shield	ABS plastic with steel liner	Warranty	3 years limited
-HP	.25 HP				10 years polyethylene
Productivity — The Charger 2716 DB Plus covers 32,432 sq. ft. per hour, for a total of 114,512 sq. ft. per charge. (Floor coverage figures taken from ISSA 447 Cleaning Times.)					




The Vac-Trac Dust Control System collects floor finish dust in a filter bag at the front of the machine (under the sliding battery compartment lid) for enhanced IAQ.

1 The battery cover lid slides forward on a steel rail for quick access to batteries and dust control paper filter bag.

7 The durable rotocast polyethylene body resists dents, cracks, and corrosion.

2 The Flexiwall shield surrounds the pad, preventing cords and debris from entering the pad rotation area.

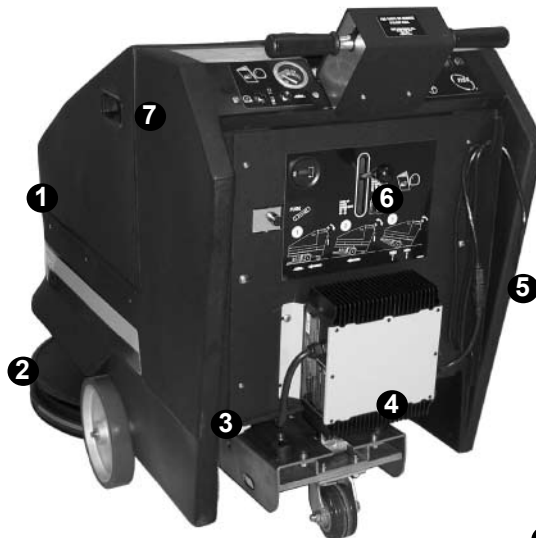

6 Using the tilt-lever, the machine can tip from the operating to the transport to the pad change position.

5 The low sidewalls on the Charger 2716 DB Plus allow easy installation and removal of batteries.

3 The variable-speed wheel-drive differential makes the Charger 2716 DB Plus extremely maneuverable.

4 The on-board battery charger provides the convenience of charging the batteries anytime, anywhere.



NSS® Enterprises, Inc.
 3115 Frenchmens Road
 Toledo, Ohio 43607-2958 USA
 419/531-2121 Fax 419/531-3761
www.nss.com
mailus@nss.com
 Specifications subject to change without notice.

DISTRIBUTED BY