

®

CFP™ Floor Polishers



www.clarkeus.com

Clarke®
Quality Since 1916.

The Clarke® *CFP*™ Polisher Line – *Premium Quality Features at a Value Price!*



Simply by unlocking and lowering the handle, the Super Flex power cord releases easily and quickly for getting the job started fast.



The dual speed model has a simple switch to change from 180 to 320 rpm. Also, there is an indicator light that illuminates when the carbon motor brushes need replacement.



The wide stance of the transport wheels promote maximum stability when rolling over thresholds.



A full wrap around bumper protects the floor.




Short cut bristle pad driver comes standard with polisher.




Powerful motors in both 1 hp and 1.5 hp have dual capacitors to maximize startup and run torque.



The simple modular switch design promotes fast and easy repairs to minimize maintenance costs.

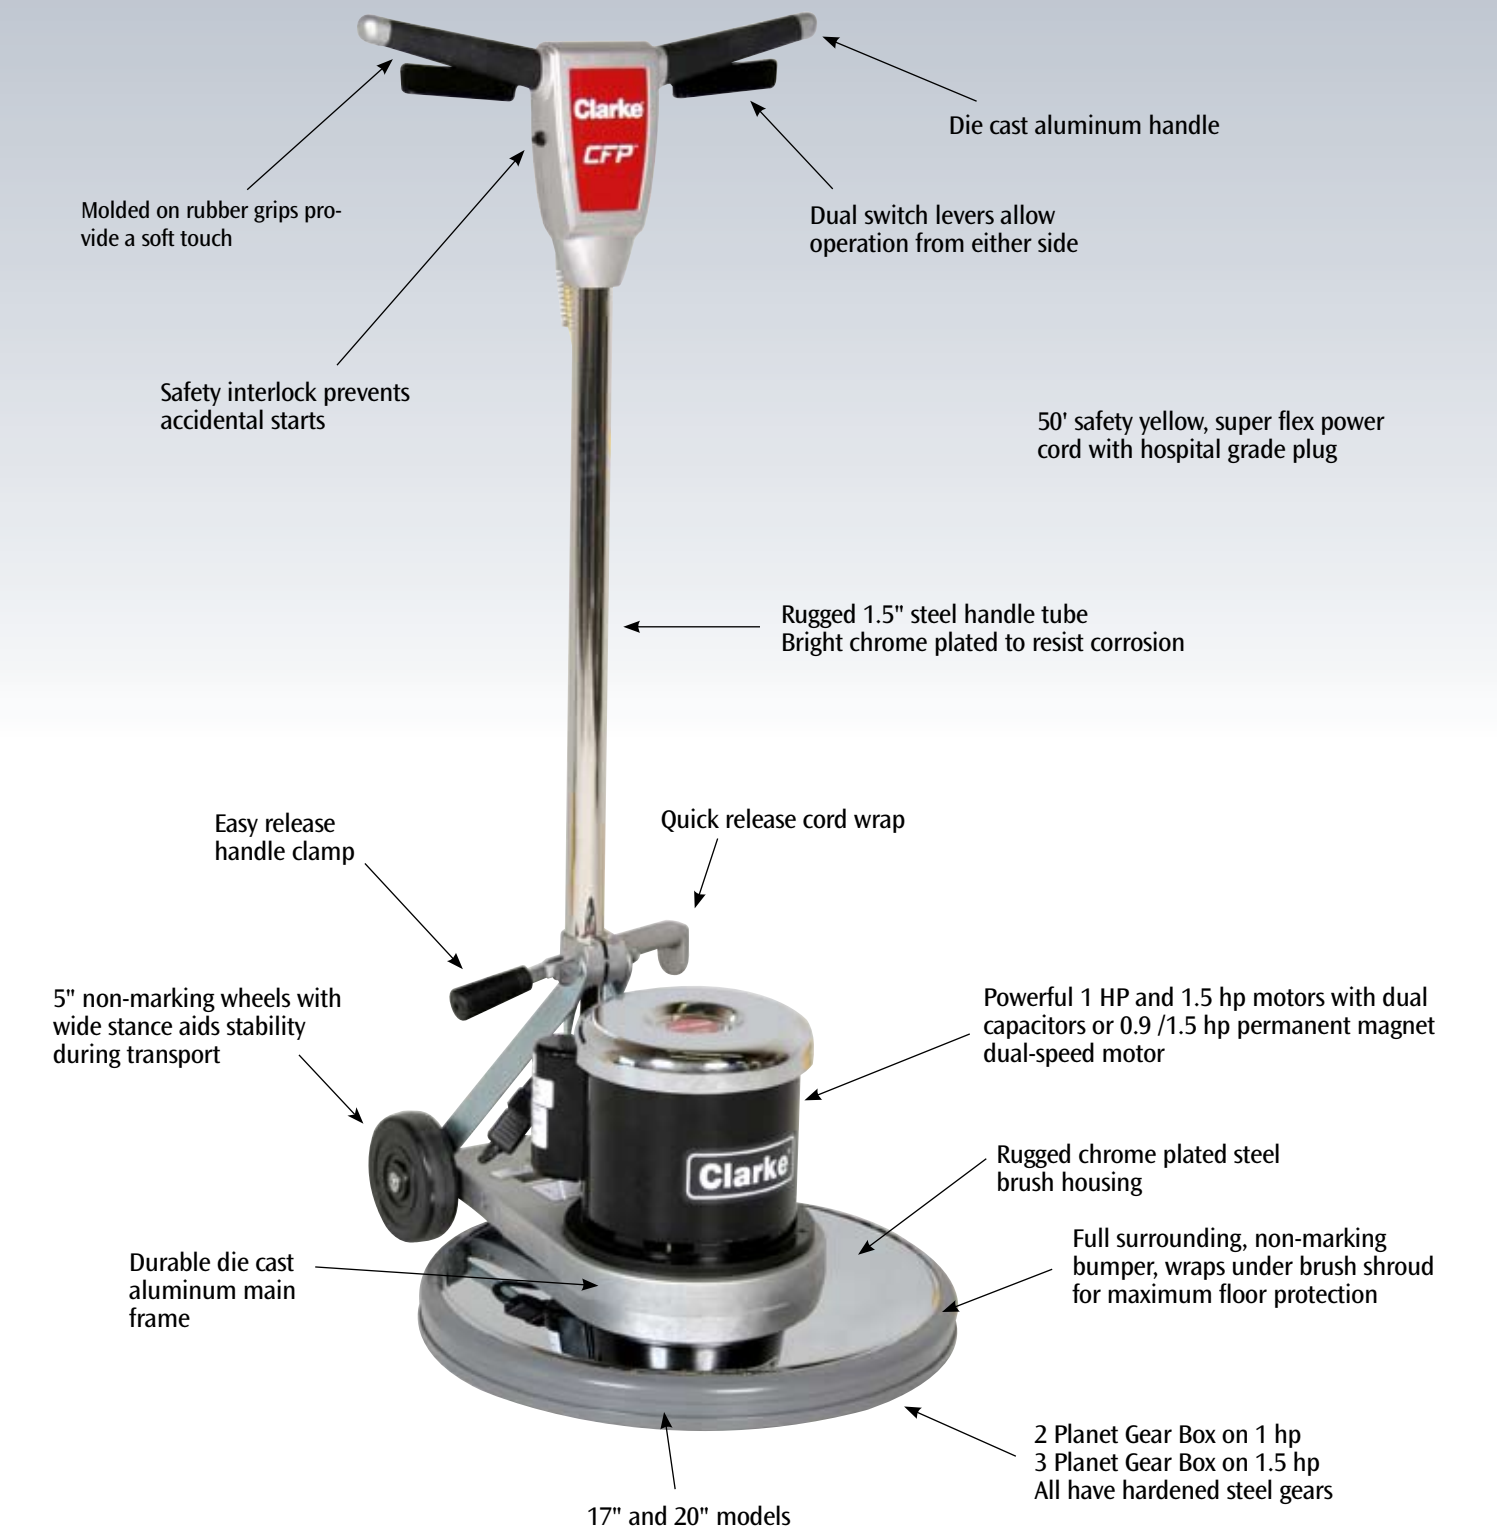



KEY FEATURES

- Chrome plated steel brush housing, motor cover and handle tube are easy to clean and provide maximum durability and corrosion resistance
- Smooth and rugged steel planetary gear systems
- FM style handle design provides best operator control and comfort
- Multiple sizes and horsepower to fit any application requirement

SPECIFICATIONS

SPECIFICATIONS	130	170	200	1700	2000	1700 DS	2000 DS
Part Number	01281A	01280A	01360A	01320A	01400A	01431A	01430A
Brush Diameter	13" (33 cm)	17" (43.2 cm)	20" (50.8 cm)	17"(43.2 cm)	20" (50.8 cm)	17" (43.2 cm)	20" (50.8 cm)
Brush Speed	175 rpm					180/320 rpm	
Voltage	120 Volts						
Horsepower	1 hp (0.75 kW)			1.5 hp (1.1 kW)		0.9/1.5 hp (0.67/1.1 kW)	
Motor	Dual Capacitor Induction					DC Permanent Magnet	
Gear Box	Dual Planetary			Triple Planetary			
Power Cable	50' (15 m) Super Flex, Safety Yellow with Hospital Grade Plug						
Frame	Die Cast Aluminum Alloy						
Brush Shroud	Chrome Plated Steel						
Wheels	5" (12.7 cm), Non-Marking						
Machine Weight	81 lbs. (37 kg)	83 lbs. (37 kg)	87 lbs. (39 kg)	91 lbs. (41 kg)	95 lbs. (43 kg)	77 lbs. (35 kg)	81 lbs. (37 kg)
Agency Listing	cETLus						
Warranty	5 Years Parts & Labor						

PRODUCTIVITY

- Chrome plated brush housing and handle tube resists rust - lasts longer
- Heavy duty machined steel planetary gears promote long life
- Dual capacitor, high torque motors provide maximum power and efficiency
- Die cast aluminum handle and mainframe resist abuse

EASE OF USE

- Dual switch levers allow operation with either hand
- Diehdral handle design with molded rubber grips provide best ergonomics

- Easy release handle clamp also releases power cord
- 50' super flex power cable with hospital grade plug provides durability and ease of handling

SAFETY

- All models are cETLus listed for use in USA and Canada
- Hospital grade plugs have soldered wire terminals and hardened ground plug to resist damage and keeps operator safe
- Safety interlock prevents accidental startups

ACCESSORIES

- Various brushes for all applications
- Pad drivers (*short cut bristle style included*)
- Solution tank
- Marble polishing adapter
- Concrete grinding adapters
- Wood floor sanding hard plate
- Weight kit
- Floor pads for all applications
- Diamond discs for marble polishing

Clarke®

2100 Hwy. 265
Springdale, AR 72764
www.clarkeus.com

DISTRIBUTED BY:

Customer Relations: 1.800.253.0367
Fax Orders to: 1.800.825.2753
Technical Service: 1.800.356.7274

©2005 ALTO U.S. Inc., All Rights Reserved. Specifications subject to change without notice. P/N 71084A Rev. 12/07

