

®

Ultra Speed® Series

Burnishers



www.clarkeus.com

Clarke®

Cleaning Power Since 1916.

Ultra Speed® Burnishers – Get optimal high shine for your floors with minimal effort.



The Ultra Speed is ultra quiet for noise sensitive areas. Dust control model shown.

The Clarke Ultra Speed line of corded burnishers have the latest in innovative features that provide the highest shine with minimum effort. The self adjusting pad pressure assures optimal power is applied to the pad driver without the need to change any settings or make adjustments. The Ultra Speed is lightweight, easy to maneuver, and is very quiet when working in noise sensitive areas. The powerful motor of the Ultra Speed supplies the highest power permitted from a wall outlet.

Some great features of the Ultra Speed burnishers include:

- High Performance Burnishing
- Ease of Operation
- Models with or without dust control
- 1500 and 2000 rpm models available
- Rugged, 8 year warranted main frame
- Quiet Operation




Easy to operate pedal releases the control handle to the operate or storage position.



The fold down handle permits the burnisher to fit into compact storage spaces.



The upright storage position allows for easy pad change .

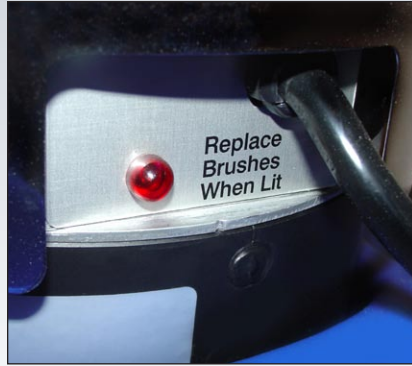

Motor carbon brush wear indicator light alerts the operator to protect the motor.



A quick release cord wrap assists the removal of the power cable without unwrapping.



Passive dust control eliminates airborne dust and collects it in a convenient filter bag.



Flexible pad driver with full face pad grip contours to uneven floors.

Ultra Speed® Series Burnisher

Clarke®



Key Features

- Indestructible Polydur® mainframe
- Self regulating pad pressure
- Powerful 1.5 hp DC permanent magnet motor
- Floating handle latches over for compact storage
- Super flex power cable with hospital grade plug

SPECIFICATIONS

SPECIFICATIONS	US 1500		US 1500 DC		US 2000 DC	
Part Number	01530A	01531A	01540A	01541A	01550A	01551A
Voltage	120V	240V	120V	240V	120V	240V
Frequency	50/60 Hz					
Motor	1.5 hp DC permanent magnet with integrated brush wear indicator					
Pad (RPM)	1500				2000	
Pad Diameter	20" (50.8 cm)					
Dust Control	N/A		Passive with dual air port filter bag collection			
Handle Positions	3 position - locks upright, locks folded over motor, floats in operation					
Handle Latch	Foot pedal release					
Operator Control Handle	Ergonomic dihedral design made of die cast aluminum with molded rubber grips					
Wheels	5" (12.7 cm) non-marking					
Power Cable/Plug	50' (15.24 m) Super Flex with hospital grade plug		75' (22.9 m) Super Flex with hospital grade plug			
Main Frame	Polydur® molded frame					
Motor Cover	Chrome plated steel					
Sound Level	70 dB(A)		66 dB(A)		67 dB(A)	
Storage	Stores in a compact, upright position with the handle folded over and locked					
Storage Dimensions LxWxH	24" x 16" x 42.3" (61 x 40.6 x 107.3 cm)					
Weight	70 lbs. (31.8 kg)			79 lbs. (35.8 kg)		
Agency Approvals	cETLus Listed					
Warranty	Polydur® Body - 8 Years, Parts - 3 Years, Labor - 1 Year					

WHO USES THIS MACHINE?

- Schools
- Hotels, Motels
- Retail Stores
- Hospitals/Medical Facilities
- Apartment Complexes
- Cleaning Contractors

WHAT DOES IT DO BEST?

- Produces high gloss finish
- Provides limitless run time
- Filters and contains airborne dust (dust control models)

WHAT ENHANCES ITS PRODUCTIVITY?

- Powerful 1.5 HP motor
- Electric cord provides limitless run time
- 20" burnishing path
- Quick release power cable removal
- Flexible pad driver contours uneven floors

WHAT ENHANCES ITS DURABILITY?

- Direct drive, no belts to wear
- Self-regulating pad pressure
- Indestructible Polydur® molded body
- Super flex power cable

- Hospital grade power plug
- Motor carbon brush wear indicator

WHAT ARE THE SAFETY FEATURES?

- Safety start push button
- Safety yellow power cable
- Full face pad grip pad driver
- Dual lever run activation

Clarke®

2100 Highway 265
Springdale, AR 72764
www.clarkeus.com

DISTRIBUTED BY:

Customer Relations: 1.800.253.0367
Fax Orders to: 1.800.825.2753
Technical Service: 1.800.356.7274

©2007 ALTO U.S. Inc., All Rights Reserved. Specifications subject to change without notice. P/N 71428A 07/07

