
A new generation of high-performance scrubbers

optimal productivity and consistent results



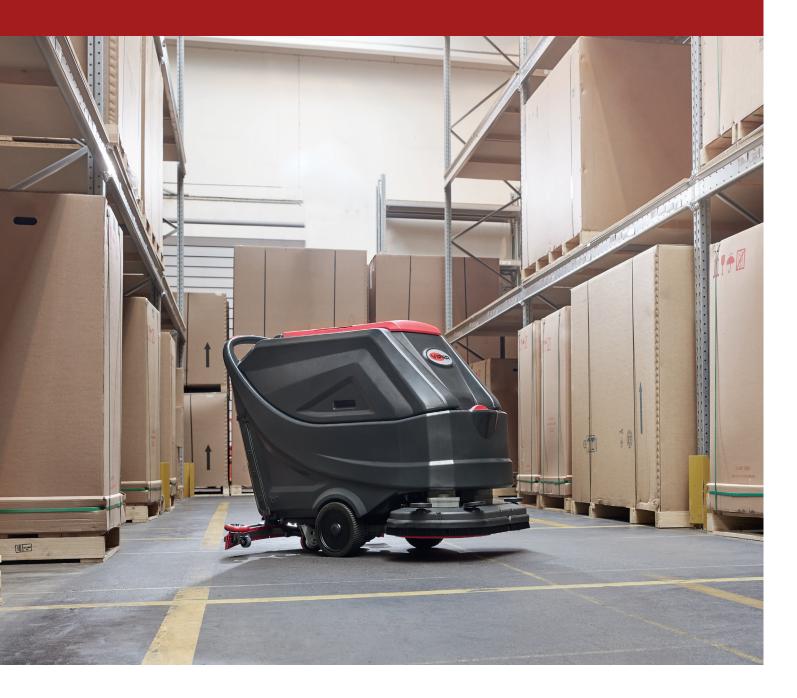

A more convenient solution for fast, easy, and effective floorcare

The VIPER AS6690T/AS7690T/AS7190TO walk-behind scrubbers prioritize smart performance, simple design, and user-friendly operation for cleaning medium to large sized areas. The AS6690T and AS7690T are both equipped with dual-brush decks for fast, effective cleaning, while the AS7190TO uses an orbital scrub deck for intensive multidirectional floorcare.

Each is an ideal solution for facility-managers and contract cleaners who need impressive results in hard-floor areas, whether they're performing routine cleaning, heavy-duty scrubbing, or finish removal (orbital version).

Key features include:

- · Eco mode greatly extends battery run time for greater productivity.
- Silent mode allows for cleaning in noise sensitive areas and is ideal for daytime cleaning.
- Finish removal mode icon enables chemical-free floor finish removal (AS7190TO only).
- Traction drive for increased productivity while reducing operator fatigue.
- Designed for quick and convenient tools free daily maintenance requirements.



Orbital technology for multidirectional floor cleaning or floor finish removal (AS7190TO)



Intuitive control panel with LCD screen comes standard on all models (AS6690T/AS7690T shown)

© 2020 Nilfisk, Inc. Form L3494V 0220



Large opening recovery tank and standard debris tray for quick and thorough clean up

Technical Specifications

Description	AS6690T	AS7690T	AS7190TO
Cleaning path	26 inches (66 cm)	30 inches (76 cm)	28 inches (71 cm)
Solution/recovery tank size	22/24 Gal (85/90 L)		
Sound pressure level (normal/silent mode)	69 ± 3 dB (A) / 65 ± 3 dB (A)		
Theoretical Productivity (Max.)	28,400 ft²/hr	32,700 ft²/hr	24,400 ft²/hr
Estimated run time	Up to 4 hours		
Brush/pad diameter	2 x 13 inch (33 cm)	2 x 15 inch (38 cm)	28 x 14 inches (71 x 35.5 cm)
Brush/pad pressure	71/90/108 pounds	77/95/112 pounds	93/120/143 pounds
Brush speed (normal / ECO)	200 / 160 RPM		2200 / 1600 RPM
Brush motor power	2 x 500 Watt / 2 x 0.66 HP		750 Watt / 1.0 HP
Drive motor power	250 W / 0.33 HP		350 W / 0.47 HP
Vacuum motor power	500 W / 0.66 HP		
Vacuum capacity	60 ln / 150 cm of H₂O		
Squeegee width	33 inches (83 cm)	33 inches (83 cm) 38 inches (95 cm)	
Machine Size (L x W x H)	59 x 29 x 40 inches (149 x 73 x 102 cm)	61 x 33 x 40 inches (155 x 83 x 102 cm)	59 x 30 x 40 inches (149 x 75 x 102 cm)
Shipping weight (w/o batteries)	444 pounds (202 kg)	451 pounds (205 kg)	473 pounds (215 kg)
Gross wt. (with batteries and full tank)	765 pounds (347 kg)	772 pounds (350 kg)	794 pounds (360 kg)

Specifications subject to change without notice.

Nilfisk, Inc.

9435 Winnetka Ave. North Brooklyn Park, MN 55445 www.nilfisk.us Phone: 800-214-7700 Fax: 800-989-6566

Nilfisk Canada Co.

240 Superior Boulevard Mississauga, ON, Canada L5T 2L2 www.nilfisk.ca Phone: 800-668-8400

Phone: 800-668-8400 Fax: 800-263-5111





- Pad drivers (disc version)
- Brush deck skirt (disc version)
- Recovery tank debris tray
- Linatex front and rear squeegee blades
- On-board charger (WET battery packages)
- Shelf charger (AGM battery packages)