



CREATING A CLEANER, SAFER, HEALTHIER WORLD.

EQUIPMENT



ATLV[®] 4300

ALL-TERRAIN LITTER VACUUM

- Improves the image and health of your community with superior litter pickup
- Increases productivity by adapting to all terrains
- Ensures operator safety with stable, low-center-of-gravity design

THE **SAFE AND EFFICIENT** SOLUTION FOR ALL-TERRAIN, OUTDOOR SWEEPING



Tennant built the ATLV® 4300 to tackle real-world operating conditions. Whether climbing over curbs, navigating hills or cleaning along fence lines, the rugged ATLV 4300 delivers. The ATLV keeps all your outdoor surfaces clean. From asphalt and concrete to turf and grass, you'll always make a good first impression.

IMPROVE THE IMAGE AND HEALTH OF YOUR COMMUNITY

The high-performance vacuuming power of the ATLV, complemented by its long-arm vacuum, allterrain tires and curb climbing ability, keep grassy grounds, parking lots, fence lines and shrub beds free of trash, cigarette butts, bottles and more.

MAXIMIZE PRODUCTIVITY

Easy-to-use features require less training time, so operators get out and cleaning more quickly. During operation, a quick peak through canister portholes reveals the debris level in the ATLV's unmatched, extra large capacity hopper. Operators effectively clean longer between stops, knowing that the top-mounted vacuum fan continually provides unrestricted airflow. Empties go smoothly with the wide-angle, tilt-out litter tank for easy access debris removal.

RELY ON SAFE, STABLE OPERATION

Clean with confidence knowing that the ATLV provides safe, stable operation with its low center of gravity design, highly effective disk brakes and standard rollover protection system.


INSIDE THE ATLV[®] 4300

Debris container uses standard, off-the-shelf trash bags for lower supply costs. Container tilts out for easy cleaning.

Top-mounted vacuum fan design ensures debris will not go through the vacuum fan.

ROPS certified overhead bar provides operator protection from rollovers.

Ergonomic design includes power/tilt steering and the easy-access vacuum hose.

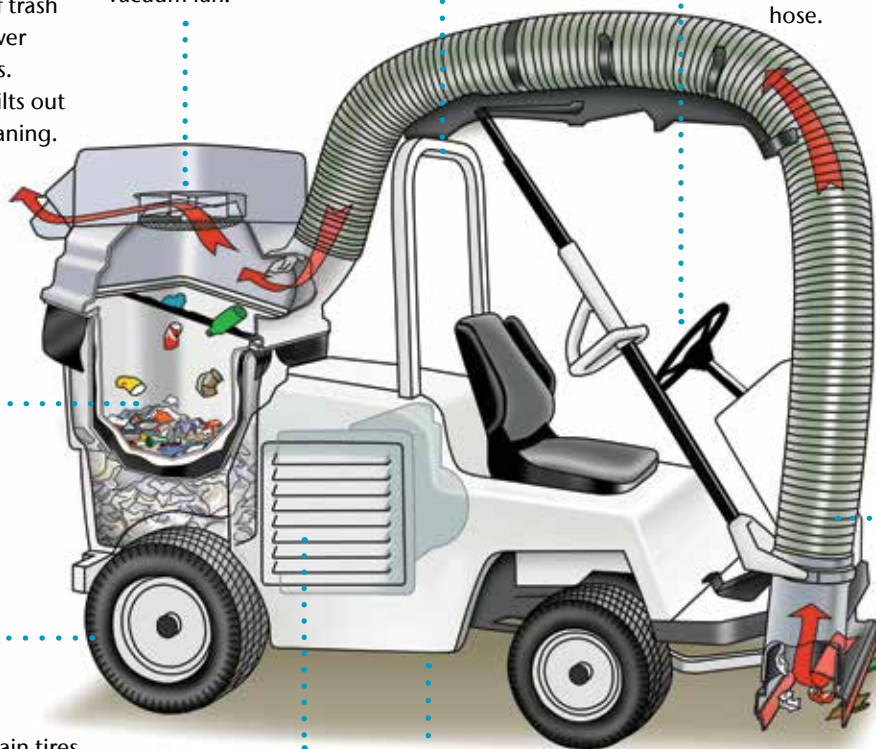

Four all-terrain tires maximize mobility and minimize ground compaction.

Easy cleanout, quick access, swing out hydraulic cooler.

High ground clearance accommodates uneven terrain and street curbs.

Adjustable vacuum hose can be repositioned for easy litter pick up.

LONG-LASTING AND DURABLE

A corrosion-resistant polyethylene canister with optional bagless liners, as well as the self-cleaning impeller inlet screen, keeps the ATL V cleaning and looking better longer.

Access the vacuum hose for additional cleaning reach with the optional fence line nozzle.

Water assisted dust control configurations help contain air-borne dust.

Provide cleaning comfort from the elements with optional a ROPS certified cabin.

KEY OPTIONS



- Reduce rework, labor and safety costs by using only TennantTrue parts and service.
- Ensure optimal cleaning performance by selecting a TennantTrue Service program provided by a network of over 400 factory-trained Tennant service representatives.
- Improve uptime by leveraging TennantTrue parts and service.
- Simplify budgeting by bundling TennantTrue service plans, including parts, into the purchase or financing of your machine.

Lease. Pre-Owned. Rent. Tennant has flexible options that get you the machines you need, however you need them.

ATLV® 4300 ALL TERRAIN LITTER VACUUM

VACUUM SYSTEM

Type
Time required to cover a football field
Debris hopper
Volume capacity
Bag capacity-each
Bag size

VACUUM NOZZLE

vacuum nozzle
1/2-hour
110 gal / 416 L
55 gal / 208 L
44 X 55 in, 3 mm / 1120 X 1400 mm

VACUUM SYSTEM

Nozzle size (diameter)
Vacuum fan (diameter)

8 in / 200 rpm
17 in / 430 mm

PROPELLING SYSTEM

Propel speed forward (variable to)
Propel speed forward (variable to)
Engine-diesel, liquid cooled Kubota
Gross Intermittent Power*
Tennant Governed Power
Engine-turbo diesel, liquid cooled Kubota (optional)
Gross Intermittent Power*
Tennant Governed Power
Type
Motors
Hydraulic
Pumps
Oil cooler
Gradeability
Full & empty hopper

16.0 mph / 26.0 km/h
5.0 mph / 8.0 km/h
24.8 hp / 18.5 kW @3000 rpm
24.8 hp / 18.5 kW @3000 rpm
32.8 hp / 24.5 kW @3000 rpm
32.8 hp / 24.5 kW @3000 rpm
Hydrostatic
Both rear wheels
1 propelling,1 accessory
Fin type
12.0 deg / 21%

MACHINE SPECIFICATIONS

Length
Width
Height
Weight-net base machine
Turning radius

102 in / 2,590 mm
46 in / 1,170 mm
84in / 2,130 mm
1,860 lb / 844 kg
18 in / 460 mm

WARRANTY

See your local representative for warranty information.

*Per SAE J1995
Specifications subject to change without notice.

SEEING IS BELIEVING

For a demonstration or additional information,
call +1.800.553.8033 or email info@tennantco.com

Tennant
701 North Lilac Drive
Minneapolis, MN 55422 USA

USA/Canada: +1.800.553.8033
Quebec: +1.800.361.9050
Overseas: +1.763.540.1315

www.tennantco.com
info@tennantco.com