

5700



Industrial-Strength Scrubber

- Superior cleaning performance from aggressive scrubbing system delivering up to 300 lbs. of down pressure
- Maximized machine longevity from industry-leading engineering and industrial-grade construction
- Dramatically-reduced empty/fill cycles and increased cleaning uptime from foam-based FaST™ technology



FaST
Foam Scrubbing Technology

The Safe Scrubbing Alternative®

Superior cleaning performance and worry-free operation from the benchmark for industrial scrubbers

The industrial-grade, heavy-duty 5700 sets the standard for walk-behind scrubbers, providing consistent, quality cleaning results even in the harshest environments.

Rugged, industrial-strength durability

Aluminum squeegee assembly and scrub heads, shock-absorbing frame, and durable polyethylene construction enable the 5700 to withstand the most severe cleaning challenges.

Superior performance from aggressive scrubbing systems

Up to 300 lbs. of down pressure, optional cylindrical scrubheads, and heavy-duty motor options provide the scrubbing strength to meet the highest cleaning standards.

The safest way to clean

FaST is the best way to meet the highest cleaning standards using 70% less solution. That's because FaST foam cleans so well it not only captures existing soil, it also removes old, slippery detergent residues. The result is a cleaner, higher-traction floor that reduces your risk of slip-and-fall.

Maximum uptime for years of worry-free operation

Superior engineering, proven results and exclusive 10/3/3 warranty mean you can count on the 5700 to clean day after day.



MUST-HAVE OPTIONS

Extend your cleaning reach

The 5700 is available in three path widths, along with an optional off-aisle power wand for greater reach.

Industrial performance

Choose the optional dual vac fan for up to 30% more vacuum lift to pick-up bulky, tough soils found in industrial facilities.

Boost scrubbing power and versatility

Optional heavy-duty brush motor (32-inch disc model) offers superior soil removal on hard surfaces.







FaST FLOORS ARE SAFER FLOORS

FaST is the only automatic scrubbing system certified to increase floor traction up to 21% by the National Floor Safety Institute, reducing the risk of slip-and-fall.

FaST foam cleans so well, it uses 70% less solution to remove existing soil, as well as old, slippery detergent residue resulting in clean, higher-traction floors.

With the self-contained FaST-PAK™, operators are safer, never handling chemicals.

FaST foam uses up to 70% less water and 90% less detergent – conserving water, reducing waste disposal, and making FaST the safest environmental choice.

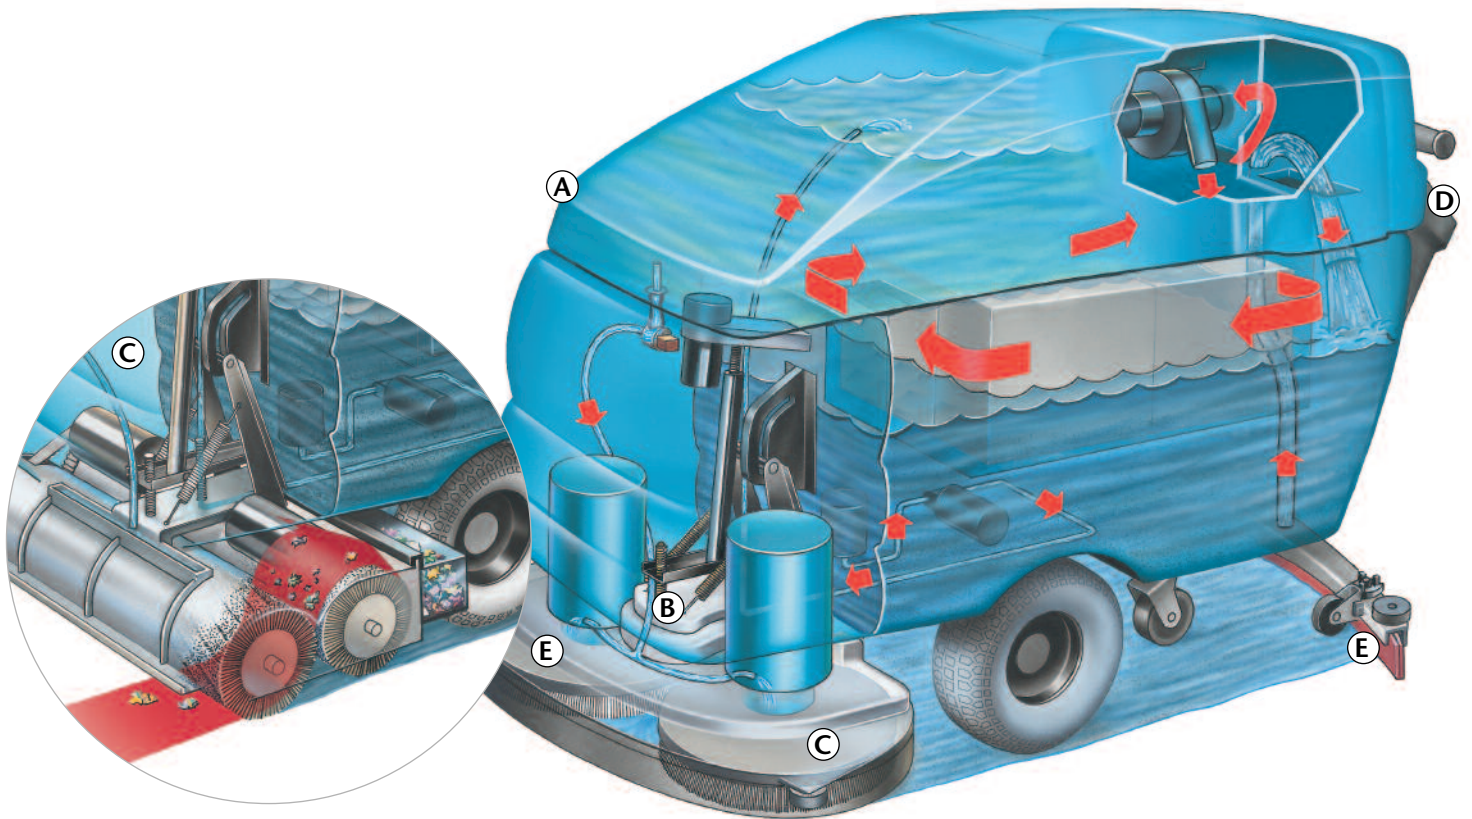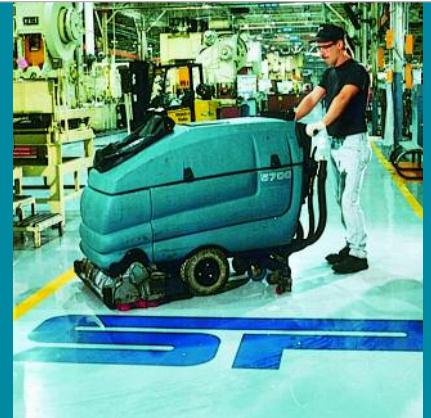

A

Withstands the harshest cleaning environments with thick polyethylene construction and a rugged, shock-absorbing frame and scrub-head linkage.

B

One-pass cleaning performance – even in the dirtiest environments – with fully adjustable down pressure up to 300 lbs. and brush speeds of up to 750 rpm.

C

Fully customizable to meet your specific needs. Choose from three path widths and switch from disc to cylindrical scrub heads easily and without tools.

D

Maximize operator productivity with smart ergonomic features like a height-adjustable console that puts controls within easy reach.

E

Reduce maintenance costs with breakaway squeegee, large demisting chamber and scrub heads that provide long-life corrosion resistance.



GENUINE TENNANT PARTS, SUPPLIES & SERVICE

Foam-based FaST: the Key to Peak Productivity and Safety

Using an innovative foam-based detergent delivery system, scrubbers with FaST increase productivity, eliminate the need for operators to handle chemicals, and leave just-cleaned floors immediately dry and safe for traffic.

Genuine Tennant Parts Advantage

Operate your machine with confidence by choosing genuine Tennant parts. Only authentic Tennant parts are engineered in conjunction with Tennant equipment. For years of worry-free operation, accept only genuine parts and supplies.

Industry's Only Factory-Direct Service Network

Tennant offers the only factory-trained, locally based network of 400+ service techs dedicated to keeping your cleaning program up and running.

WARRANTY

A minimum of ten (10) years on rotationally molded polyethylene housing and parts free from defects and workmanship under normal use and service. The non-polyethylene parts a three (3) year – or 2500 hours of operation – warranty under normal use and service. On-site service labor coverage of warranty items for three (3) years.



FaST is the first and only automatic cleaning system certified by the NFSI to dramatically improve overall floor traction by up to 21%.

SEEING IS BELIEVING

See why cleaning professionals depend on the 5700 walk-behind scrubber for total quality assurance. For a demonstration and additional information, call [800.553.8033](tel:800.553.8033).

5700 INDUSTRIAL-STRENGTH SCRUBBER

FEATURES	28 in/700 mm	32 in/800 mm	36 in/900 mm
Productivity (per hour)			
Theoretical Max	33,320 ft ² /3,095 m ²	38,080 ft ² /3,540 m ²	42,840 ft ² /3,980 m ²
Estimated Coverage*			
Conventional	20,800 ft ² /1,930 m ²	24,000 ft ² /2,230 m ²	27,200 ft ² /2,530 m ²
FaST	23,400 ft ² /2,175 m ²	27,000 ft ² /2,510 m ²	30,600 ft ² /2,845 m ²
Dimensions/Weights			
Product width			
Without squeegee	30 in/762 mm	34 in/864 mm	38 in/965 mm
With squeegee	37.5 in/950 mm	42 in/1070 mm	45.5 in/1160 mm
Product height			
	43 in/1090 mm		
Product length			
Disc	64 in/1625 mm		
Cylindrical	63 in/1600 mm		
Product weight (with batteries)			
	817 lbs/371 kg		
Brush/Pad Drive System			
Brush motor horsepower (2)			
Disc	0.6 hp	0.6 hp(std)/1.0 hp (heavy-duty)	1.0 hp
Cylindrical (all sizes)	0.75 hp		
Brush RPM			
Disc	320 RPM(std)/300 RPM(heavy-duty)		
Cylindrical	750 RPM		
Brush/pad pressure			
Disc	0–200 lb/0–91 kg		
Cylindrical	0–90 lb/0–41 kg		
	(up to 300 lb/136 kg on 32 in heavy-duty disc model)		
Solution Delivery System			
Solution capacity			
	30 gal/114 liter		
Solution flow rate			
Conventional	0–1.5 gpm/5.7 lpm		
FaST	0.22 gpm/0.8 lpm		
Recovery System			
Recovery tank capacity			
	40 gal/151 liter		
Vacuum motor			
	0.8 hp/0.6 kW		
Vac motor CFM			
	65 cfm/1.84 cmm		
Vac motor sealed waterlift			
	73 in/1854 mm		
Battery System			
System voltage			
	36 volt		
Battery amp hour rating (Standard)			
	235 AH @ 20 hr		
Battery amp hour rating (Optional)			
	335 AH @ 20 hr		
Battery run time (continuous cleaning rating)			
	3.5 hours (235 AH)/4.5 hours (335 AH)		
Decibel Rating			
Operator's position			
	75 dBa		

*Scrubbing speeds, empty/rinse/refill times were taken from the ISSA 447 Cleaning Times Handbook published in 2004. Assumes 2-inch (5 cm) overlap. Conventional flow rates are at 0.5 gpm (1.9 lpm).