


T3



## Walk-behind Floor Scrubber

- Just-scrubbed floors immediately dry and safe for traffic with FaST®
- 75% lower sound level (68.5 dBA)
- Easily cleanable, sanitary Hygenic® solution and recovery tanks

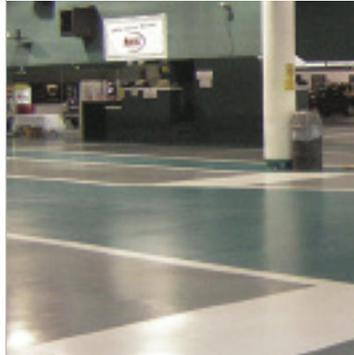

**FaST**  
Foam Scrubbing Technology

The Safe Scrubbing Alternative®

# A high-performance scrubber to match your higher standards.

The T3 scrubber delivers an advanced state of safety and cleanliness with award-winning FaST technology and a sound level 75% quieter than leading competitive models.

## CREATE A CLEAN, SAFE AND HEALTHY ENVIRONMENT

### Improve environmental health in your facility

Exclusive Hygenic tanks allow for easy access and sanitization, reducing mold, bacteria and other contaminants that can grow in enclosed tanks.

### Quietly clean in noise-sensitive environments

At only 68.5 decibels, the T3 is 75% quieter than leading competitive models – comparable to normal conversation levels.

### Leave behind no cleaning solution

Even around 180-degree turns, the T3's equal-pressure, parabolic squeegee recovers all cleaning solution from the floor.



## NFSI-Certified FaST: The Safe Scrubbing Alternative®

Equip your T3 with optional FaST (Foam-activated Scrubbing Technology) – the first scrubbing system certified high-traction by the National Floor Safety Institute.

FaST foam not only removes existing soil, but also old detergent residues, increasing traction 21% and reducing the risk of slip-and-falls.

Operators are safer – they never handle chemicals thanks to the FaST-PAK® detergent.

Using up to 70% less water, floors dry faster, increasing safety and productivity.

Maximize productivity, cleaning more than 10.75 ft² on just one tablespoon of water with FaST technology.



## Reach a new standard of safety and cleanliness with the T3.

Eliminate the need for follow-up passes and non-productive mop-ups with the fully self-adjusting splash skirt that captures 100% of scrub deck overspray.



Scrub for up to 80 minutes on a single tank – up to 90% longer than comparable machines – when you equip the T3 with Green Seal certified FaST.



Easily train new operators to use the simple, intuitive control panel.



Save time and storage space with the on-board charger.



Eliminate operator contact with toxic wastewater and prevent clogged hoses/drains with the convenient debris tray.



## ENGINEERED FOR SAFETY

**Minimize the risk of slip-and-fall injuries and help control insurance costs.** Floors are clean, dry and safe for foot traffic almost immediately when scrubbed with FaST.

**Reduce operator fatigue and increase productivity.** Ergonomic design makes cleaning with the T3 more comfortable for your staff.

**Increase scrubbing effectiveness and quality.** Clear sight lines and simple controls mean operators can focus solely on their cleaning environment.





## FaST-PAK® CLEANING CONCENTRATE

Easy-to-handle FaST-PAK cartridges are safe to use on a variety of floors, effectively cleaning light-to-heavy soils and grease.

Available in FaST 365 daily cleaner, 665 heavy duty cleaner, or 965 heavy duty degreaser.

### Tested Safe for Floor Finishes

The nationally-recognized independent testing laboratory, ASPEN, determined that FaST:

- Performs as well as or better than conventional scrubbing;
- Effects on finish gloss are the same as conventional scrubbing.

*For a copy of test results, please call toll-free 800.553.8033.*



FaST is the only scrubbing system certified by the NFSI to increase floor traction up to 21%.

## T3 WALK-BEHIND FLOOR SCRUBBER

| FEATURES  | T3 17 in Pad Assist   | T3 20 in Pad Assist<br>(20 in w/Drive)  |
|---|---|---|
| <b>Productivity (per hour)</b>  |   |   |
| Theoretical Max   | 20,230 ft <sup>2</sup> / 1,900 m <sup>2</sup>   | 23,800 ft <sup>2</sup> / 2,200 m <sup>2</sup>   |
| Estimated Coverage* (Conventional)                                    | 8,440 ft <sup>2</sup> / 780 m <sup>2</sup>  | 10,125 ft <sup>2</sup> / 940 m <sup>2</sup><br>(16,065 ft <sup>2</sup> / 1,490 m <sup>2</sup> )   |
| Estimated Coverage* (FaST)  | 11,250 ft <sup>2</sup> / 1,050 m <sup>2</sup>   | 13,500 ft <sup>2</sup> / 1,260 m <sup>2</sup><br>(21,420 ft <sup>2</sup> / 2,000 m <sup>2</sup> ) |
| <b>Brush/Pad Drive System</b>   |   |   |
| Cleaning path   | 17 in / 430 mm  | 20 in / 510 mm  |
| Brush motor horsepower  | 1.0 hp  | 1.0 hp  |
| Brush RPM   | 230 rpm   | 230 rpm   |
| Brush/pad pressure  | 50 lbs/23 kg & 90 lbs/41 kg   | 50 lbs/23 kg & 90 lbs/41 kg   |
| <b>Solution Delivery System</b>                                       |   |   |
| Solution tank description   | Full access & cleanable   | Full access & cleanable   |
| Solution capacity   | 10.5 gal / 40 L   | 10.5 gal / 40 L   |
| <b>Recovery System</b>  |   |   |
| Recovery tank description   | Full access & cleanable   | Full access & cleanable   |
| Recovery tank capacity<br><small>(includes demisting chamber)</small> | 15 gal / 57 L   | 15 gal / 57 L   |
| Vacuum motor  | 0.5 hp – two stage  | 0.5 hp – two stage  |
| Vac motor CFM   | 65 cfm / 1.84 cmm   | 65 cfm / 1.84 cmm   |
| Vac motor sealed waterlift  | 40 in / 1,020 mm  | 40 in / 1,020 mm  |
| <b>Battery System</b>   |   |   |
| System voltage  | 24 volt   | 24 volt   |
| Battery amp hour rating   | 105 AH @ 20 hr  | 130 AH @ 20 hr<br>(155 AH @ 20 hr)  |
| Battery run time <small>(continuous cleaning rating)</small>          | 2.5 hours   | 2.5 hours (3 hours)   |
| <b>Dimensions/Weights</b>   |   |   |
| Product height  | 43 in / 1,090 mm  | 43 in / 1,090 mm  |
| Product length  | 48 in / 1,220 mm  | 50.25 in / 1,280 mm   |
| Product width <small>(with squeegee)</small>                          | 30 in / 760 mm  | 30 in / 760 mm  |
| Product weight <small>(with batteries)</small>                        | 319 lbs / 145 kg  | 343 lbs / 156 kg<br>(391 lbs / 177 kg)  |
| <b>Total Power Consumption</b>  |   |   |
| Power consumption amps  | 27 amp nominal  | 29 amp nominal<br>(30 amp nominal)  |
| <b>Decibel Rating</b>   |   |   |
| Operator's position   | 68.5 dBA  | 68.5 dBA  |
| <b>Warranty</b>   |   |   |
| 10/3/3  | A minimum of ten (10) years on rotationally molded polyethylene housings and parts free from defects and workmanship under normal use and service. The non-polyethylene parts a three (3) year—or 2,500 hours of operation—warranty under normal use and service. On-site service labor coverage of warranty items for three (3) years. |   |

*\*Estimated coverage rates use the practical speed and empty/fill time standards from the 2004 ISSA Cleaning Times handbook.*

## SEEING IS BELIEVING

See for yourself how the T3 scrubber can help you reach a higher standard of cleanliness and safety in your facility. For a demonstration or additional information, call [800.553.8033](tel:800.553.8033).

**Tennant Company**  
 701 North Lilac Drive  
 P.O. Box 1452  
 Minneapolis, MN 55440-1452  
 800.553.8033  
 d: 763.540.1200  
 In Quebec: 514.335.6061  
 f: 763.513.2112  
 tennantco.com  
 info@tennantco.com